
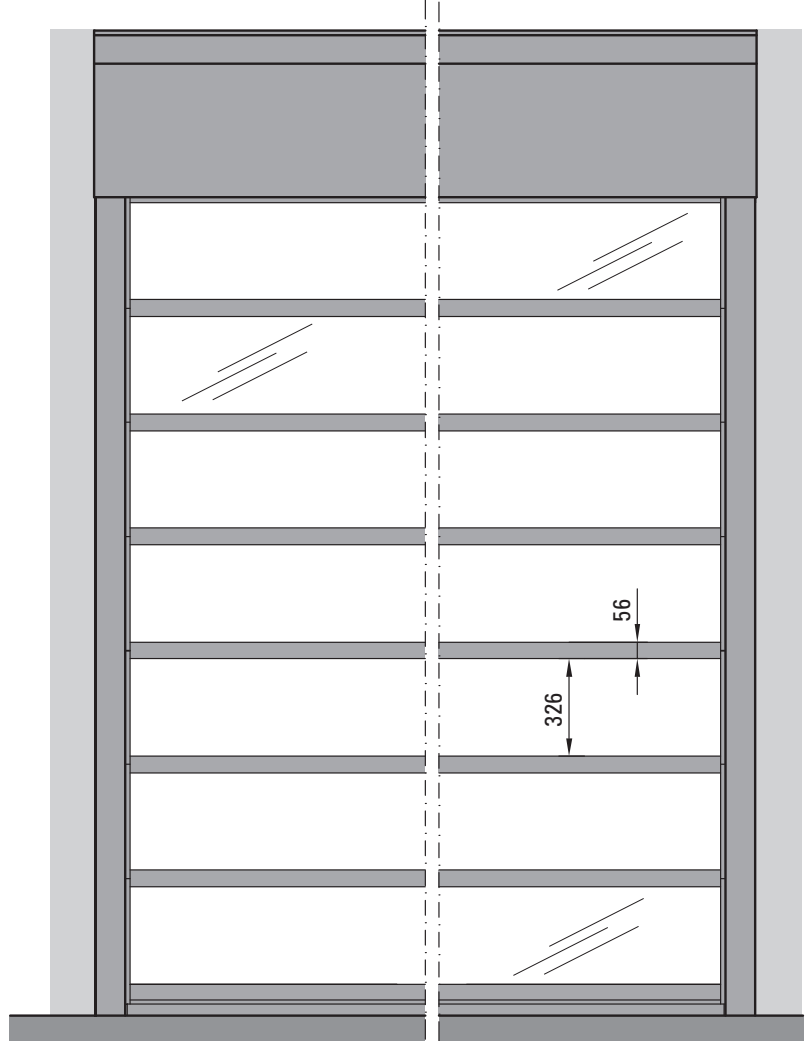


Butzbach GmbH
 Industrietore
 Robert-Bosch-Strasse 4
 89257 Illertissen (Germany)


Tel. +49 (0) 73 03 - 95 10
 Fax +49 (0) 73 03 - 95 14 70
 info@butzbach.com
 www.butzbach.com

BUTZBACH
 MADE IN GERMANY

Technical Data Mobile Partition Wall

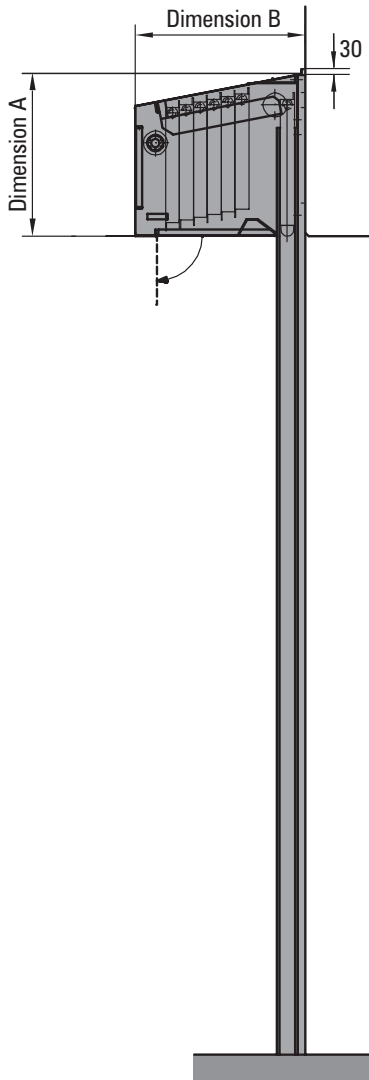

Dimensions	without mounting frame		including mounting frame	
	A	B	A	B
Up to 7 door panels	530	550	535	575
8-10 door panels	555	690	560	715
11-12 door panels	555	780	560	805

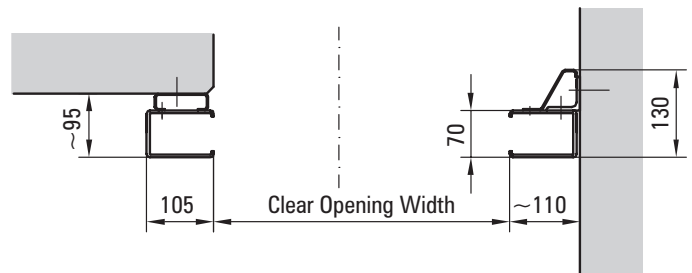

Technical Data

Mobile Partition Wall

Mains connection (supplied by contractor) 230 V/ 50 Hz¹; pre-fuse 10 A

Drive unit/ motor power 740 W/ 780 W/ 810 W; mode: short-time operation KB 5 min
Note! The operator is responsible for the door inspection according to the VDE 100-610 or IEC 60364-6-61 respectively. For a three-phase current connection a »clockwise rotating field« has to be applied.

Control voltage 230 V AC

Control system Reversing switch in dead-man's control;
option: Self-holding circuit, reversing automatically if safety edge was actuated.

Material of the door panels Either tempered safety glass (6 mm thick) or polycarbonate (5 mm thick). Upon request: panels with colour coated aluminium sheet metal (3 mm) or laminated glass (11 or 13 mm thick).

Material of the tracks Aluminium extruded section, surface anodized - natural colour - (according to DIN 17611, E6 EV1); option: surface colour-anodized (according to DIN 17611) or alternatively RAL-colour coated.

Material of the frame profiles For panel widths < 4 021 mm: Aluminium; ≥ 4 021 mm: Aluminium mit V2A-reinforcement; surface anodized - natural colour - (according to DIN 17611, E6 EV1); option: RAL-colour coated (according to DIN 17611).

Opening-/closing speed 3 m/min

Dimensions Clear opening width: min. 0.8 m / max. 5.50 m;
clear opening height: max. 4.65 m depending on the total weight of the Mobile partition Wall.
Larger clear opening widths: Supported by a movable mullion.

Safety Anti-drop device Butzbach AS TW PG, sensitive edge with mechanical contactor via forced-opening safety contacts; burglar retardant due to an automatic lock function of the closed partition wall; mechanical overload protection.

Emergency operation With crank handle (sun-blind handle), operational from standing position.

Care With plain water and a common, commercially available glass cleaning agent.

¹ Depending on size and design, a mains connection of 400 V/ 50 Hz and a 10 A three phase current automation (supplied by contractor) may be necessary.