

view from inside

cassette for head section fixing
from c/o width 6000 upwards the head section
must additionally be supported in the centre.
(including in delivery)

upper fixing bracket


wind protection

finger protection:
height 2500mm

functional gap approx. 10mm

fixing bracket
at the bottom

control panel ³⁾

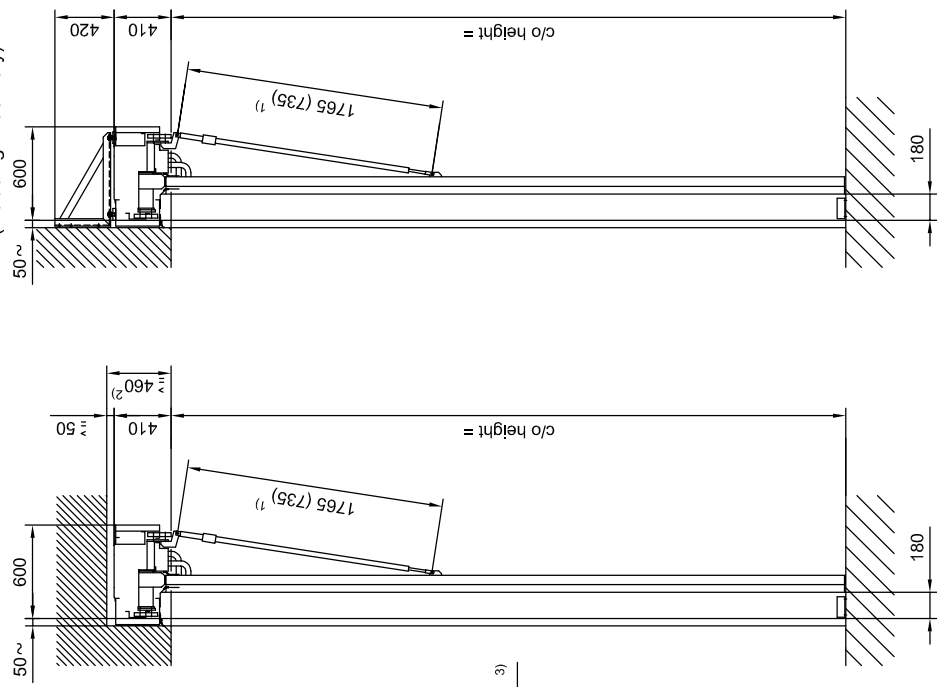

section A - A

from c/o width 6000

from c/o width 6000 upwards the head section
must additionally be supported in the centre.
(including in delivery)

section A - A

to c/o width 6000



section B - B

mounting behind the reveal

door open

mounting under the reveal

door open

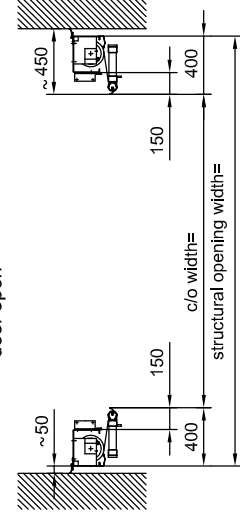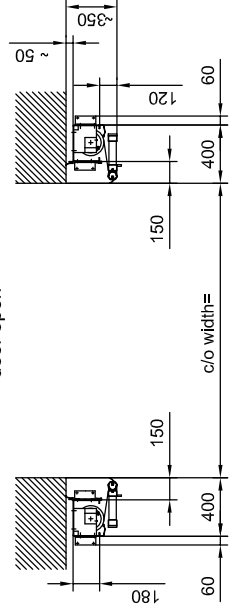

subject to technical alterations!

- 1) 735 at c/o height \leq 3749
- 2) space required for mounting under the reveal
- 3) mounting optional to the left or right on the supporting framework

NOVOSPRINT HS 3 V

technical data sheet;

05/24/3/2

Jan. 2007

CAD: NOVO-HS3V

Umferschutzmärk DIN 34

BUTZBACH
MADE IN GERMANY

Industriestore - Weiherstr. 16
D - 89293 Kellmünz