




view from inside

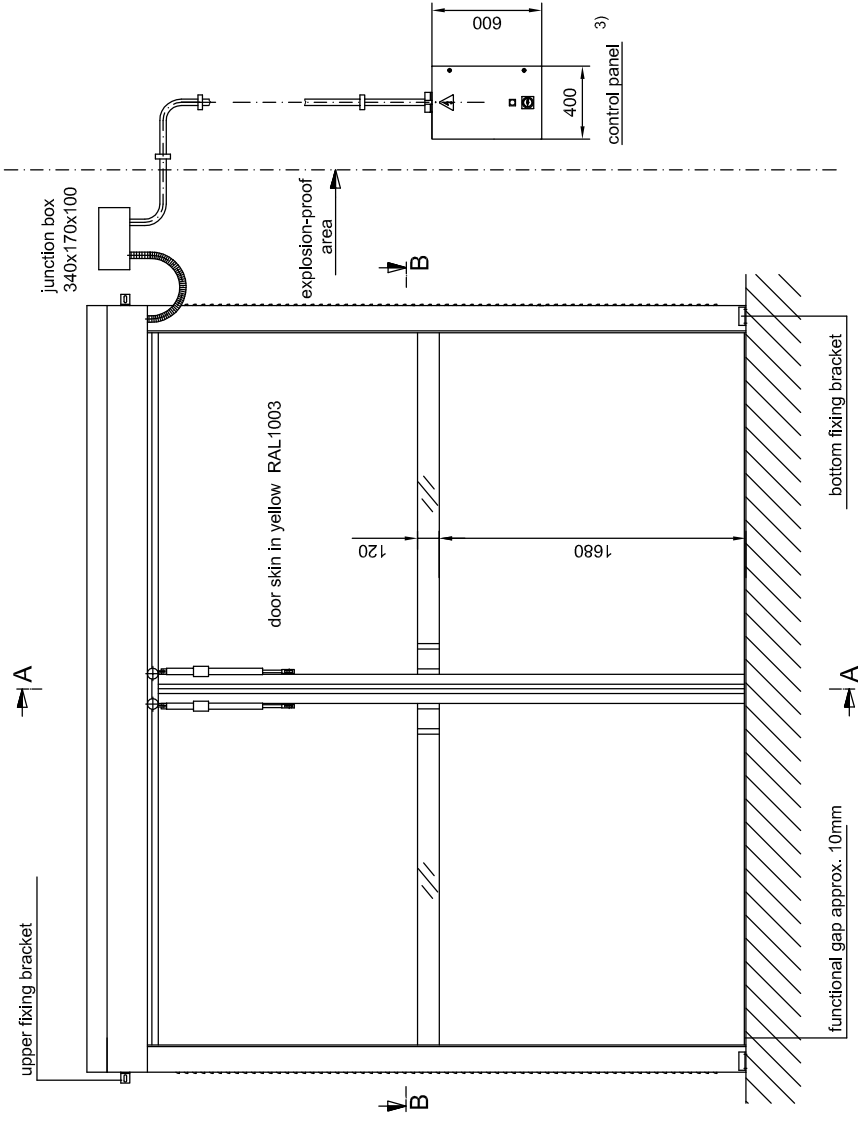

section A - A

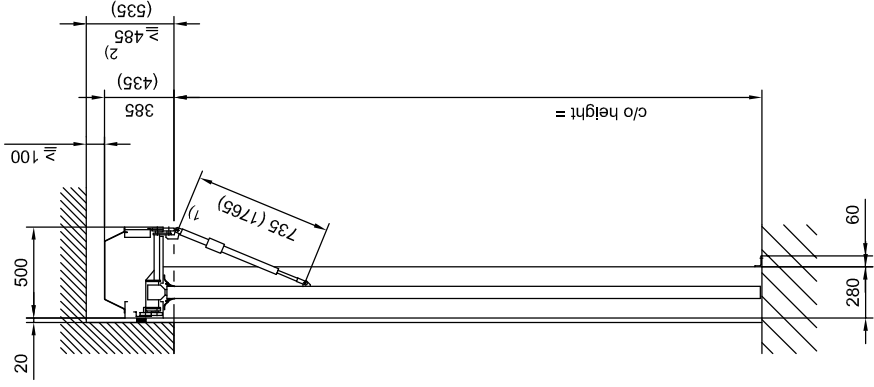

section B - B

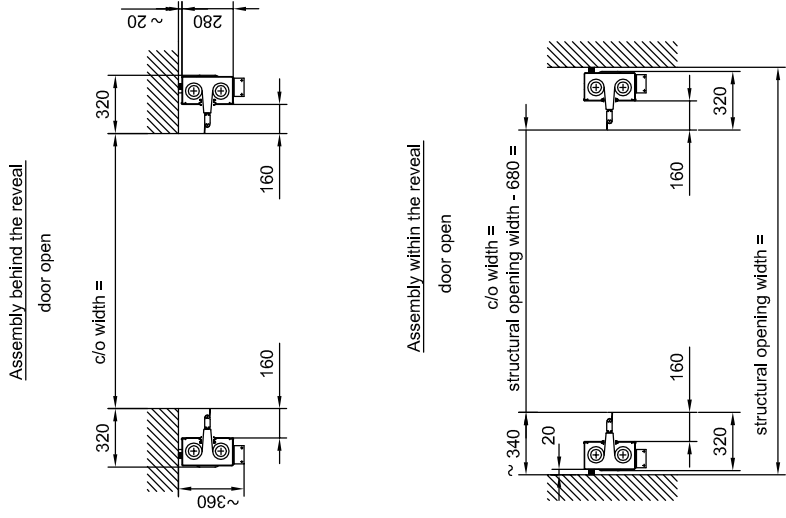

- 1) 1765 for c/o height \geq 3600
not to apply for c/o height \leq 2800 (steel profile is fixed)
- 2) space required for assembly below the reveal
535 for c/o height \leq 2500
485 for c/o height $>$ 2500 *
- 3) to be fixed outside explosion-proof area

* can be mounted either left or right

subject to technical alterations!